




12/2/59

E. M. G. S.

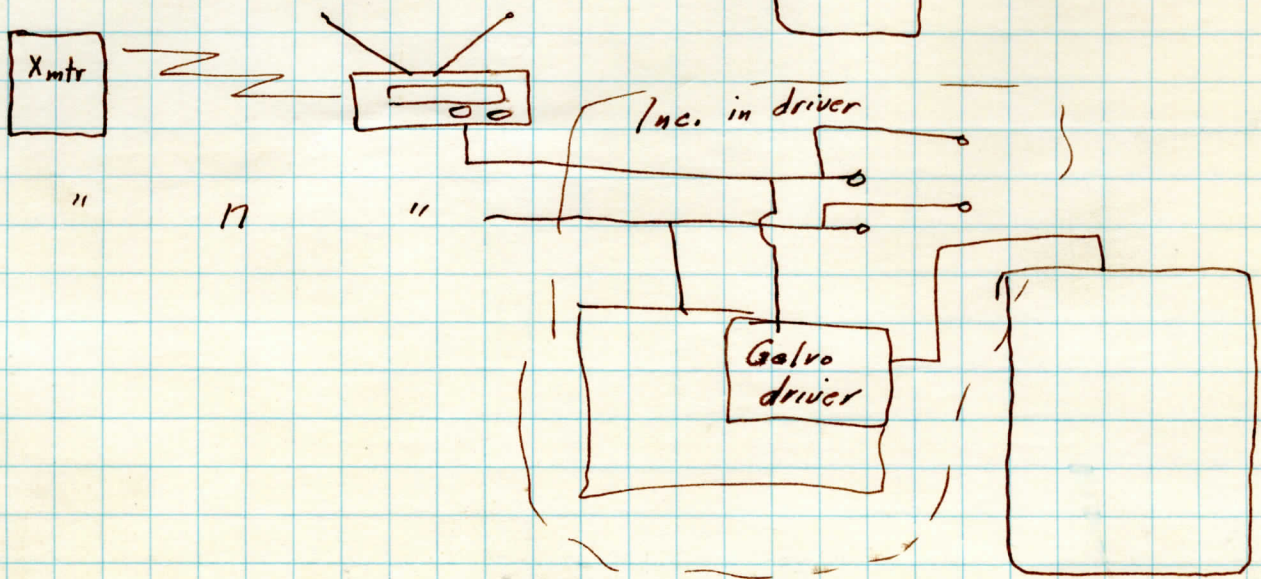

+ receiver

Transmitter, freq. mod., continuously tunable over 88-108 mc. - min. operating range of 50', transmitter input impedance $\geq 100,000 \text{ ohms}$, receiver output impedance $\leq 5000 \text{ ohms}$, system freq. response 10 Hz to 10 Kc at 3 db. points. Transmitter must operate from internal rechargeable batteries & an open a minimum operating time of 12 hours. after a full charge. The receiver

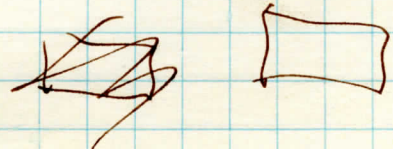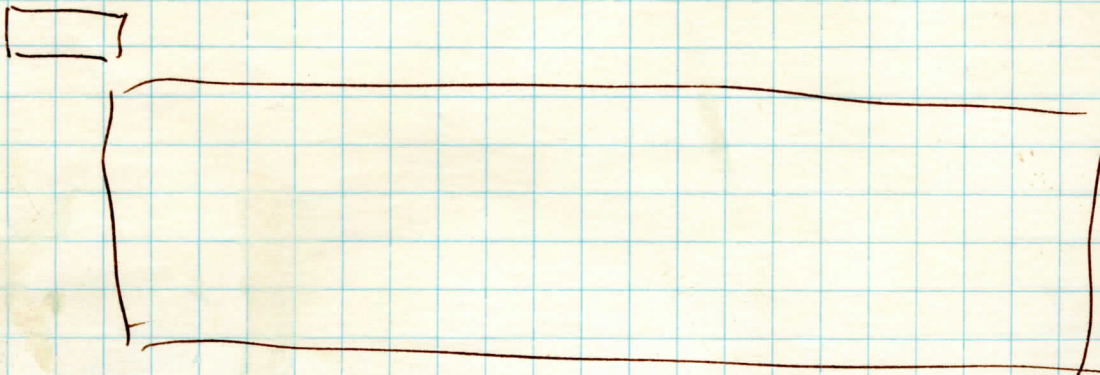

EMG-

3 X mtr - \$ 180 ea \$ 540.
3 recvs - 135, ea 465.

1 control box 250 ea
3 Amp - 75 ea
dolly 100.

2550
127.50

25

Total

2550 -

2422 -

384 for Galvo